

S.C. TOP GEOCARD S.R.L. – Distribuitorul Autorizat in Romania al Leica Geosystems



Bucuresti - Sediul Central
Str. Prof. Ion Maiorescu, Nr. 67, Sect. 2
Tel: 021.253.05.30; Fax: 021.252.12.15;
web: www.topgeocard.ro

- when it has to be **right**



Leica Zeno GG04 plus High accuracy everywhere



leica-geosystems.com



- when it has to be **right**



Leica Zeno GG04 plus Smart Antenna


High accuracy **everywhere**


Collecting high accuracy geospatial data on your smartphone or tablet has never been easier.

The latest innovation in the Leica Zeno range can pair with all existing Zeno handhelds and a wide range of Android, Apple or Windows® smart devices, bringing cutting-edge GNSS technology and industry-leading 555 channel tracking power into the hands of all.

The rugged, flexible and easy-to-use smart antenna not only utilises RTK technology but can now apply Precise Point Positioning (PPP). This now makes real-time, high-accuracy data collection possible in the most demanding of locations without the need for a mobile data connection.


With its compact, lightweight design and IP68 durability, you can work for longer in all conditions, as the world of high accuracy mapping comes to life at your fingertips.

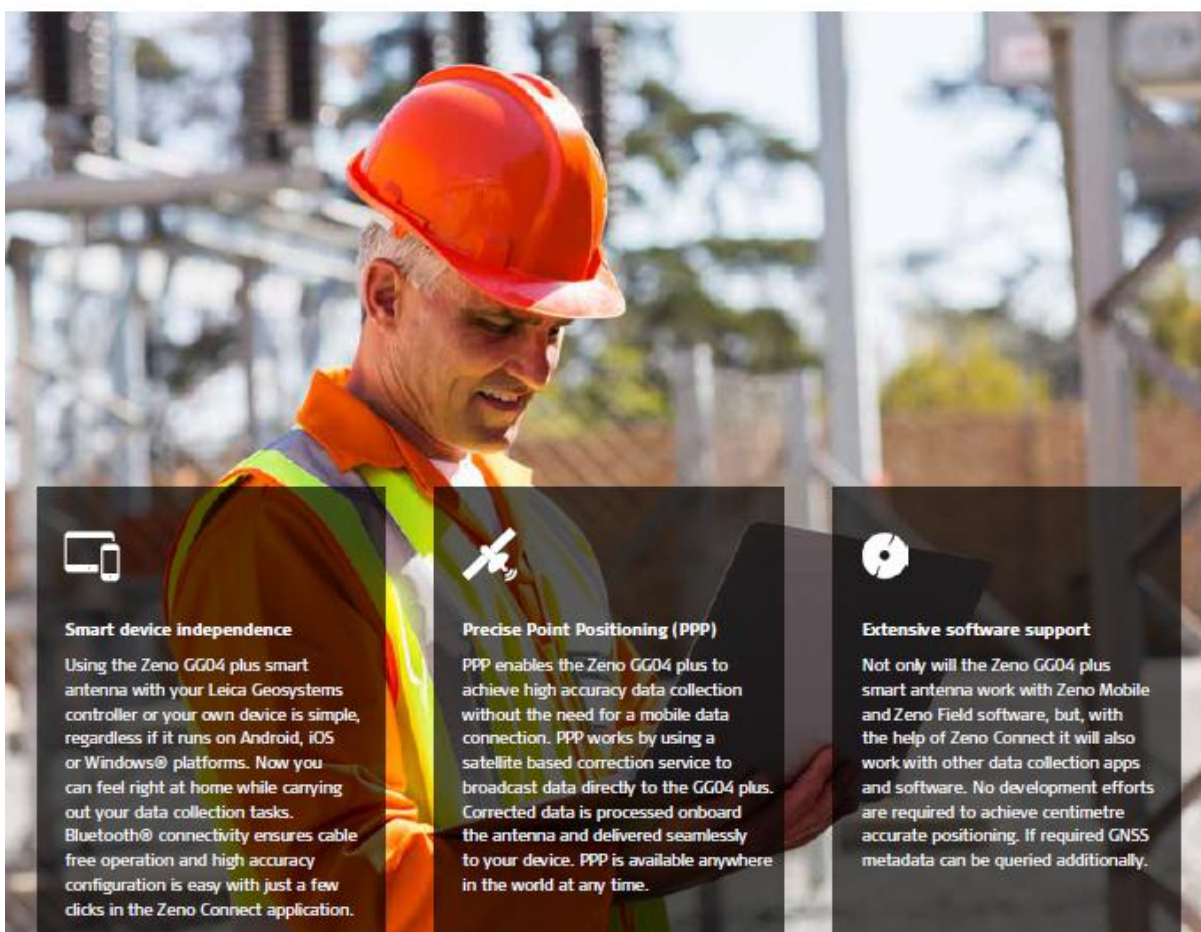




Smart device independence

Using the Zeno GG04 plus smart antenna with your Leica Geosystems controller or your own device is simple, regardless if it runs on Android, iOS or Windows® platforms. Now you can feel right at home while carrying out your data collection tasks. Bluetooth® connectivity ensures cable free operation and high accuracy configuration is easy with just a few clicks in the Zeno Connect application.



Precise Point Positioning (PPP)

PPP enables the Zeno GG04 plus to achieve high accuracy data collection without the need for a mobile data connection. PPP works by using a satellite based correction service to broadcast data directly to the GG04 plus. Corrected data is processed onboard the antenna and delivered seamlessly to your device. PPP is available anywhere in the world at any time.



Extensive software support

Not only will the Zeno GG04 plus smart antenna work with Zeno Mobile and Zeno Field software, but, with the help of Zeno Connect it will also work with other data collection apps and software. No development efforts are required to achieve centimetre accurate positioning. If required GNSS metadata can be queried additionally.



SMART DEVICE INDEPENDENCE

- Utilise your existing smartphone or tablet*
- Available for Android, Apple and Windows®
- Bluetooth® connection ensures cable-free operation

ENHANCED TRACKING PERFORMANCE

- 555 channels support an increased number of satellites
- State-of-the-art GNSS technology
- Ready for future GNSS developments

LEICA GEOSYSTEMS COMPATIBLE SOFTWARE

- Zeno Mobile
- Zeno Field, Zeno Connect
- Zeno Office
- MobileMatrix

EXTENSIVE 3RD PARTY SOFTWARE SUPPORT

- Use with your favourite data collection apps and software
- No development efforts required
- Provides NMEA messages output on different Bluetooth® ports to allow reviewing and storing of GNSS metadata information

PRECISE POINT POSITIONING (PPP)

- Achieve high accuracy data collection without a mobile data connection
- Available anywhere in the world, anytime
- Removes reliance on post-processing

BUILT TO LAST

- IP68 protection ensures water and dust resistance
- Continuous working in all environments
- All day battery life

FLEXIBILITY AND EASE

- One button operation
- Scalable performance tailored to your needs
- Mount on pole, backpack or vehicle

LEICA GEOSYSTEMS COMPATIBLE CONTROLLERS



ZENO 20



CS25 - ALL VARIANTS



ZENO 5

*Leica Geosystems cannot guarantee compatibility with all makes, models and operating systems of smartphones and tablets

Leica Geosystems – when it has to be right

Revolutionising the world of measurement and survey for nearly 200 years, Leica Geosystems is the industry leader in measurement and information technologies. We create complete solutions for professionals across the planet. Known for innovative product and solution development, professionals in a diverse mix of industries, such as surveying and engineering, building and heavy construction, safety and security, and power and plant trust Leica Geosystems for all their geospatial needs. With precise and accurate instruments, sophisticated software, and trusted services, Leica Geosystems delivers value every day to those shaping the future of our world.

Leica Geosystems is part of Hexagon (Nasdaq Stockholm: HEXA B; hexagon.com), a leading global provider of information technology solutions that drive productivity and quality across geospatial and industrial landscapes.



Apple is a trademark of Apple Inc., registered in the U.S. and other countries.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Android™ is a trademark of Google Inc.

Copyright Leica Geosystems AG, 9435 Heerbrugg, Switzerland. All rights reserved. Printed in Switzerland – 2017. Leica Geosystems AG is part of Hexagon AB. 868448en – 12.17

The Bluetooth® word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Leica Geosystems AG is under license.

Microsoft, Windows® and the Windows logo are either registered trademarks or trademarks of Microsoft Corporation in the United States and / or other countries.



Leica Zeno 5



Leica CS25 plus



Leica Zeno Connect



Leica Zeno Field & Office

Leica Geosystems AG
Heinrich-Wild-Strasse
9435 Heerbrugg, Switzerland
+41 71 727 31 31

- when it has to be **right**



Leica Zeno GG04 plus

Data sheet



Smart device independence

Using the Zeno GG04 plus smart antenna with your controller from Leica or own device is simple, regardless if it runs on Android, iOS or Windows® platforms. Now you can feel right at home while carrying out your data collection tasks. Bluetooth® connectivity ensures cable free operation and high accuracy configuration is easy with just a few clicks in the Zeno Connect application.

Precise Point Positioning (PPP)

PPP enables the GG04 plus to achieve high accuracy data collection without the need for a mobile data connection. PPP works by using a satellite based correction service to broadcast data directly to the GG04 plus. Corrected data is processed onboard the antenna and delivered seamlessly to your device. PPP is available anywhere in the world at any time.

Extensive software support

Not only will the Zeno GG04 plus smart antenna work with Zeno Mobile and Zeno Field software, but, with the help of Zeno Connect it will also work with other data collection apps and software. No development efforts are required to achieve centimetre accurate positioning. If required GNSS metadata can be queried additionally.

Technical Specifications

LEICA ZENO GG04 PLUS | GNSS TECHNOLOGY

Number of channels	555 channels (more signals, fast acquisition, high sensitivity)	
Satellite signal tracking	GPS (L1, L2, L2C, L5), Glonass (L1, L2), BeiDou (B1, B2, B3 ¹), Galileo (E1, E5a, E5b, Alt-BOC, E6 ¹), QZSS, SBAS (WAAS, EGNOS, MSAS, GAGAN), L-band	
Real-time and post-processing	Support of real-time correction service and post-processing to achieve positioning accuracy	
Output data protocols	<ul style="list-style-type: none"> Windows[®]: NMEA² via Zeno Connect Android: position provided by Location Service and NMEA² output possible, both via Zeno Connect iOS: position provided by iOS Location Feature and NMEA² output possible (via IFA protocol) via Zeno Connect 	
Update rate	20 Hz (0.05 sec) ³	
Post-processing accuracy static mode	Horizontal: 3 mm + 0.5 ppm (rms) ⁴ Vertical: 6 mm + 0.5 ppm (rms) ⁴	
Horizontal real-time accuracy (SBAS or external source)	SBAS, L1 only Spot Lite, PPP (Multi-frequency option needed) DGNS, L1 only Spot Prime, PPP (Multi-frequency option needed) RTK, Multi-frequency	$< 0.9 \text{ m}^5$ $< 60 \text{ cm}^6$ after approximately 7 minutes of converging $< 40 \text{ cm}^6$ $< 10 \text{ cm}^6$ after approximately 30 minutes of converging $< 1 \text{ cm} + 1 \text{ ppm}^6$
Vertical real-time accuracy	RTK (Multi-frequency): 2 cm + 1 ppm ⁴	
Real-time protocols	RTCM 2.x, RTCM 3.0, RTCM 3.1, RTCM 3.2, RTCM MSM, CMR, CMR+	
Integrated real-time	SBAS ⁵ (EGNOS, WAAS, MSAS, GAGAN), or PPP via L-band (requires a valid Spot option)	
Time for initialisation	Typically 6 sec ⁴	

INTERFACE & COMMUNICATION

User Interface	On/Off key Status Indicator (LED): satellite tracking, Bluetooth [®] communication and battery power
Communication port	Bluetooth [®] 4.1 class 1 & sealed and protected 8-pin Lemo combined USB / Serial232 port
Field controller connection	By Bluetooth [®] (3 ports available), RS232 or USB cable

POWER MANAGEMENT

Removable battery	GE8212 (7.4 V / 2600 mAh Li-Ion rechargeable)
Battery charging time	2 hours to full charge with GKL341
Power	Nominal 12 V DC Range 10.5 – 28 V DC
Operating time	7.5 h (RTK) ⁷ , 10 h (GNSS only) ⁷

PHYSICAL SPECIFICATIONS

Weight and dimensions	0.8 kg with all-day battery Height: 0.071 m x Diameter: 0.186 m
Proof against water, sand and dust	IP68 (IEC60529): dust and water-resistant for all conditions: Temporary submersion into water (2 hours in 1.40 m depth) and protected against blowing rain and dust
Operating / Storage temperature range	Operation: -40 to 65 °C (-40°F to +149°F) (ISO 9022-10-08, MIL-STD-810G CHG1 Method 502.6-II & ISO 9022-11-04, MIL-STD-810G CHG1 Method 501.6-I) Storage: -40 to 80 °C (-40°F to +176°F) (ISO 9022-10-08, MIL-STD-810G CHG1 Method 502.6-I & ISO 9022-11-06, MIL-STD-810G CHG1 Method 501.6-I)
Humidity	100% (ISO9022-12-04, ISO9022-13-06, ISO9022-16-02, MIL-STD-810G CHG1 Method 507.6-I)
Drop	Withstands topple over from a 2 m survey pole onto hard surface Withstands 1 m drop onto hard surface
Vibration	Withstands strong vibration (ISO9022-36-05)

ACCESSORIES & OPTIONAL FEATURES

Accessories	<ul style="list-style-type: none"> External battery charger Backpack kit Hard carry case 2 meter range pole Universal pole mounts for different sized 3rd party mobile devices
Optional field and office software	<ul style="list-style-type: none"> Leica Zeno Field Leica Zeno Mobile Leica Zeno Connect Leica Zeno Office and Leica Zeno Office on ArcGIS
Optional field computers	<ul style="list-style-type: none"> Leica Zeno 5 Leica CS25 plus rugged tablet computer or with the following 3rd party HW in combination with Leica Zeno Connect: Android: most phones and tablets with Android version > 4.1 Windows[®]: tablets/pcs/handhelds with Windows[®] 10/8/7 or WEH Apple phones and tablets⁸

¹ Belongs to comply, but subject to availability of BeiDou ICD and Galileo commercial service definition.
BeiDou B3 and Galileo E6 will be provided through future firmware upgrade.

² Supported NMEA 0183 messages: GGA, VTG, GLL, CSA, CGQ, CSW, RMC, LLL (Windows[®] only), GSD
³ 20 Hz supported for selected NMEA messages on Windows[®] only.

⁴ Measurement precision, accuracy and reliability depends upon various factors including number of available satellites, geometry proximity to base station, multipath effects, atmospheric conditions, etc.

⁵ WAAS available in North America only, EGNOS available in Europe only, MSAS available in Japan only, GAGAN available in India only.

⁶ May vary due to atmospheric conditions, multipath, obstructions, signal geometry and number of tracked satellites.
⁷ May vary with temperature, battery age, usage etc.

⁸ Check compatibility list.

Copyright Leica Geosystems AG, 9435 Heerbrugg, Switzerland. All rights reserved. Printed in Switzerland - 2017.
Leica Geosystems AG is part of Hexagon AB. 867461en - 12.17

Leica Geosystems AG
Heinrich-Wild-Strasse
9435 Heerbrugg, Switzerland
+41 71 727 31 31



The Bluetooth[®] word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Leica Geosystems AG is under license.
Microsoft, Windows[®] and the Windows logo are either registered trademarks or trademarks of Microsoft Corporation in the United States and / or other countries. Other trademark and trade names are those of their respective owners.

iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. iPad Air, iPad Pro, and iPad mini are trademarks of Apple Inc.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

"Made for iPhone" and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPhone or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone, or iPad may affect wireless performance.

- when it has to be **right**

Leica
Geosystems